


Features

1. Molded epoxy body.
2. Zero crossing circuit.
3. High input/output insulation.
4. Small size and light weight.
5. Fast reactive speed.
6. Good heat sinking.
7. Normally open.


Applications

1. Household Appliances.
2. Temperature Control System.
3. Industrial Automatic Control.
4. Lighting System.
5. Office Appliances.
6. Factory Appliances.

Outside Dimension : Unit (mm)

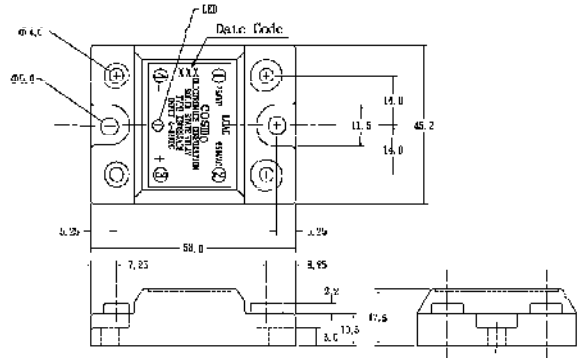

Schematic : Top View

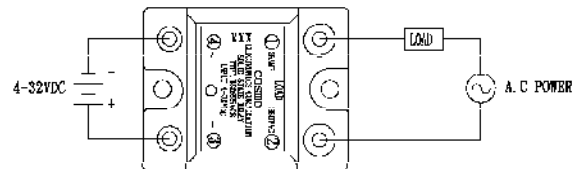

Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Input	Input Signal Voltage	V _{in}	4-32
	Drop-out Voltage	V _{do}	1
Output	RMS on-state current	I _T	25
	Peak one cycle surge current (8.3 ms)	I _{surge}	250
	Repetitive peak-off state Voltage	V _{DRM}	600
	Operating frequency	f	47-70
	Critical rate of rise of on-state current	di/dt	50
	Load supply voltage	V _{out}	250
Isolation Voltage input to output	V _{iso}	4000	
Operating Temperature	T _{opr}	-30-100	
Storage Temperature	T _{stg}	-30-125	

Electrical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit
Input	Pick-up Voltage	V _{pu}			4	VDC
	Input current	I _{in}	V _{in} =4-32V	5	12	mA
Output	On-state Voltage	V _T	I _T =1Arms		1.5	Vrms
	Operating Current	I _{op}	V _{out} =240Vrms	50		mArms
	Leakage Current	I _{leak}	V _{out} =240Vrms		3.5	mArms
	Critical rate of rise of off-state Voltage	dv/dt	See Note 1	50	200	V/μS
	Zero-cross Voltage	V _{out}	I _T =50mArms MIN	50	Yes	VAC
Load Voltage Rating	V _{out}	I _T =50mArms MIN	50		280	VAC
Minimum trigger current	I _{FT}	V _{DRM} =600V			10	mA
Isolation resistance input to output	R _{iso}	DC500V	10 ¹⁰			Ω
Turn-on time	T _{on}	60Hz AC			8.3	mS
Turn-off time	T _{off}	60Hz AC			8.3	mS
Thermal resistance (between junction and case)	R _{th(j-c)}			1.3		°C/W

Note1 : Output (dv/dt) protection is provided in all models, and they are designed to switch resistive or inductive loads to 0.2 power factor. The dv/dt rating is based on source impedance of 50 ohms.

Data Curve

Fig.1 RMS On-state Current vs. Ambient Temperature

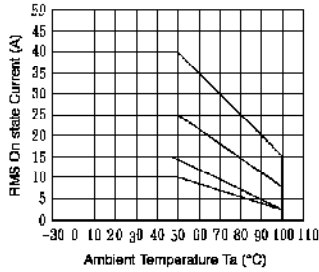


Fig.4 RMS On-state Current vs. Case Temperature

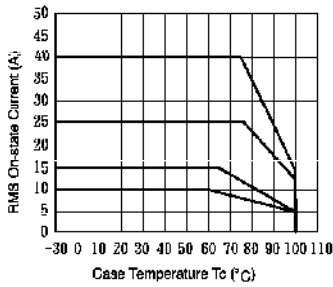


Fig.2 Surge Current vs. Time $f=60\text{Hz}$
 $T_j=25^\circ\text{C}$

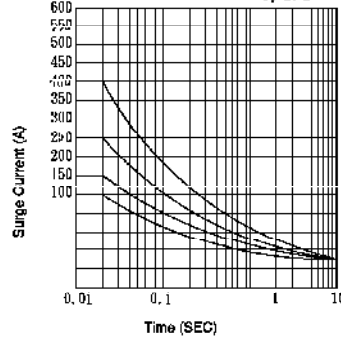


Fig.5 Input Voltage vs. Ambient Temperature

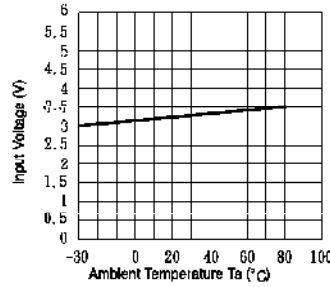


Fig.3 Open Circuit Leak Current vs. Supply Voltage
 $T_a=25^\circ\text{C}$

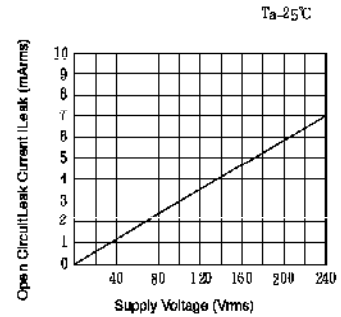


Fig.6 Input Current vs. Input voltage

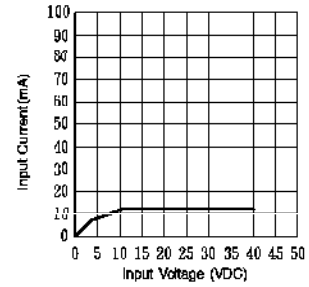


Fig.7 Action waveform

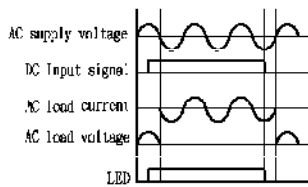


Fig.8 WIRING DIAGRAM

